




V4A<sub>premium</sub>

Acoustic fan		V4A Premium 100V	V4A Premium 230V
Standard code		V4A199	V4A336
<b>Airflow characteristics</b>			
Max. airflow @ 100 Pa	m <sup>3</sup> /h	210	210
Max. pressure	Pa	118	118
<b>Acoustics</b>			
Sound pressure level Lp @ 40 m <sup>3</sup> /h (r = 2m)	dB(A)	33	33
Sound pressure level Lp @ 160 m <sup>3</sup> /h (r = 2m)	dB(A)	34	34
<b>Electrics</b>			
Power supply		100 VAC / 50 Hz	230 VAC / 50 Hz
Motor type		Electronic commutation	Electronic commutation
Consumption @ 40 m <sup>3</sup> /h	W	12.5	12.5
Consumption @ 160 m <sup>3</sup> /h	W	22	22
IP degrees of protection		IP30	IP30
<b>Characteristics</b>			
Weight	kg	6.7	6.7
Colour		grey	grey
Material (envelope)		PS	PS
Dimensions	mm	450 x 450 x 219	450 x 450 x 219
<b>Installation</b>			
Max. available connections		4	4
Max. connectable extract units (airflow capacity)		4	4
Inlet*	mm	ø100 or ø125	ø100 or ø125
Outlet	mm	ø125	ø125
Installation in inhabitable place (cupboard, ceiling, etc)		■	■
Installation in protected non-inhabitable place (attic, etc)		■	■
Installation on wall or ceiling		■	■
Installation on the floor		■	■
<b>Maintenance</b>			
Removable filter		-	-
Easily dismountable propeller		■	■
Easily openable cover (no tools needed)		■	■
Removable electrical part (motor change without taking off the fan)		■	■
<b>Working</b>			
Direct driven propeller		■	■
Speed	RPM	1350	1350
<b>Other functions</b>			
12 VAC output for 4 boost airflow extract units supply		■	■

\*Not supplied, available as accessories

■ : standard

Airflow characteristics

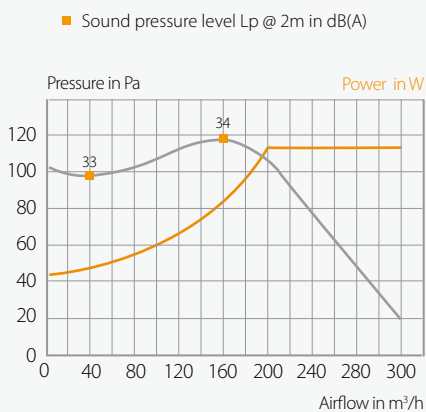

Dimensions in mm

