




VPH^e

Individual fan		VPH2 standard	VPH2 micro-watt
Standard code		VPH075	VPH076
Airflow characteristics			
Max. airflow @ 100 Pa	m ³ /h	300	300
Max. pressure	Pa	130	110
Acoustics			
Sound pressure level Lp @ 300 m ³ /h (r = 2m)	dB(A)	51	47
Electrics			
Power supply		230 VAC / 50 Hz	230 VAC / 50 Hz
Motor type		Asynchronous	Electronic commutation
Consumption @ 200 m ³ /h	W	35	15
Consumption @ 300 m ³ /h	W	42	25
IP degrees of protection		IP30	IP30
Characteristics			
Weight	kg	3.6	3.6
Colour		black and blue	black and blue
Material (envelope - propeller)		Plastic - metal	Plastic - metal
Dimensions (H x L x P)	mm	340 x 335 x 345	340 x 335 x 345
Installation			
Max. available inlet connections		6	6
Max. connectable extract units (airflow capacity)		6	6
Inlet	mm	4 x Ø80 * + 2 x Ø125*	4 x Ø80 * + 2 x Ø125*
Outlet	mm	Ø125**	Ø125**
Installation in inhabitable place (cupboard, ceiling, etc)		-	-
Installation in protected non-inhabitable place (attic, etc)		■	■
Installation on wall or ceiling		■	■
Installation on the floor		-	-
Maintenance			
Filter		-	-
Easy maintenance system with compressed air spray		■	■
Working			
Direct driven propeller		■	■
Max. speed	RPM	-	-
Other functions			
Pre-mounted fixing cord		■	■

* delivered with 2 x Ø125 mm fast and tight exhausting connectors (patented) + 4 x Ø80 mm stoppers
 ** Ø150 mm adapter available in accessory.

■ : standard

Airflow characteristics

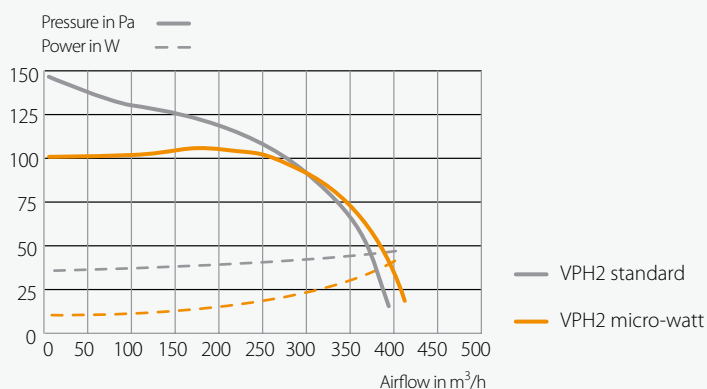

Dimensions in mm

