




TDA

Extract grille		TDA 9V	TDA 12V	TDA 12V	TDF
Standard code		TDA874	TDA873	TDA930	TDF875
Airflow characteristics					
Humidity sensitive		-	-	-	-
With boost airflow		■	■	■	fix
Boost airflow activated by presence detection		■	■	■	-
Min. airflow@ 100 Pa	m³/h	5	5	5	25 / 50 / 75 /100
Max. airflow @ 100 Pa (to set on place)	m³/h	25 / 50 / 75 /100	25 / 50 / 75 /100	25 / 50 / 75 /100	-
Acoustics					
Acoustic power Lw @ 25 m³/h - 100 Pa	dB(A)	30	30	30	30
Acoustic power Lw @ 100 m³/h - 100 Pa	dB(A)	33,3	33,3	33,3	33,3
Power supply					
Battery 9V DC		■	-	-	-
12 VAC supply (integrated)		-	■	■	-
Characteristics					
Weight	g	250	250	250	250
Colour		white	white	white	white
Material		PS	PS	PS	PS
LED detection signal		-	■	■	-
Relay connection *		-	-	■	-
Installation					
Duct compatibility	mm	ø125	ø125	ø125	ø125
Office destination		■	■	■	■
Meeting room destination (1 TDA for 4 persons)		■	■	■	■
Toilets destination		possible	possible	possible	-

* : allows the connection to an external relay to drive a light for example

■ : standard

Airflow characteristics

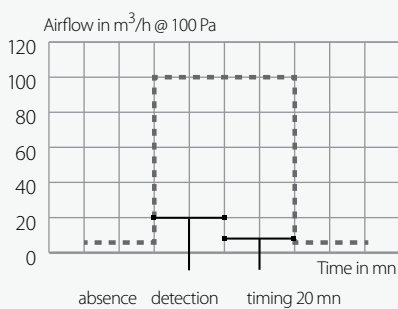

--- TDA, setting = 100

Dimensions in mm

